



# LPMS-INC1

## Dual-Axis High-Precision Inclinometer Sensor

LPMS-INC1 is a high-precision, high-stability dual-axis inclinometer sensor based on MEMS technology.

This product processes the built-in accelerometer sensor data through an integrated processing algorithm, combining filtering and calibration algorithms for correction and calculation. Ultimately, it outputs real-time digital data, including uncalibrated raw acceleration data, calibrated acceleration data, inclination data, and temperature data.


In terms of communication, the LPMS-INC1 offers multiple interface options for different applications, including RS232, CAN, RS485, or TTL. (Currently only RS232 communication model is available for sale)

### Key features


- High-precision, high-stability dual-axis inclinometer sensor based on MEMS technology
- Measurement range:  $\pm 90^\circ$
- Resolution:  $< 0.001^\circ$  (IEEE 32-bit single-precision floating-point format)
- Accuracy:  $0.011^\circ$
- Operating temperature range:  $-20$  to  $85^\circ\text{C}$
- Power supply voltage: 5-36V
- Real-time output: Raw acceleration data, calibrated acceleration data, inclination data, temperature data, etc.
- Multiple communication interface

### Application

- Engineering Machinery
- Energy & Electric power
- Bridge Construction

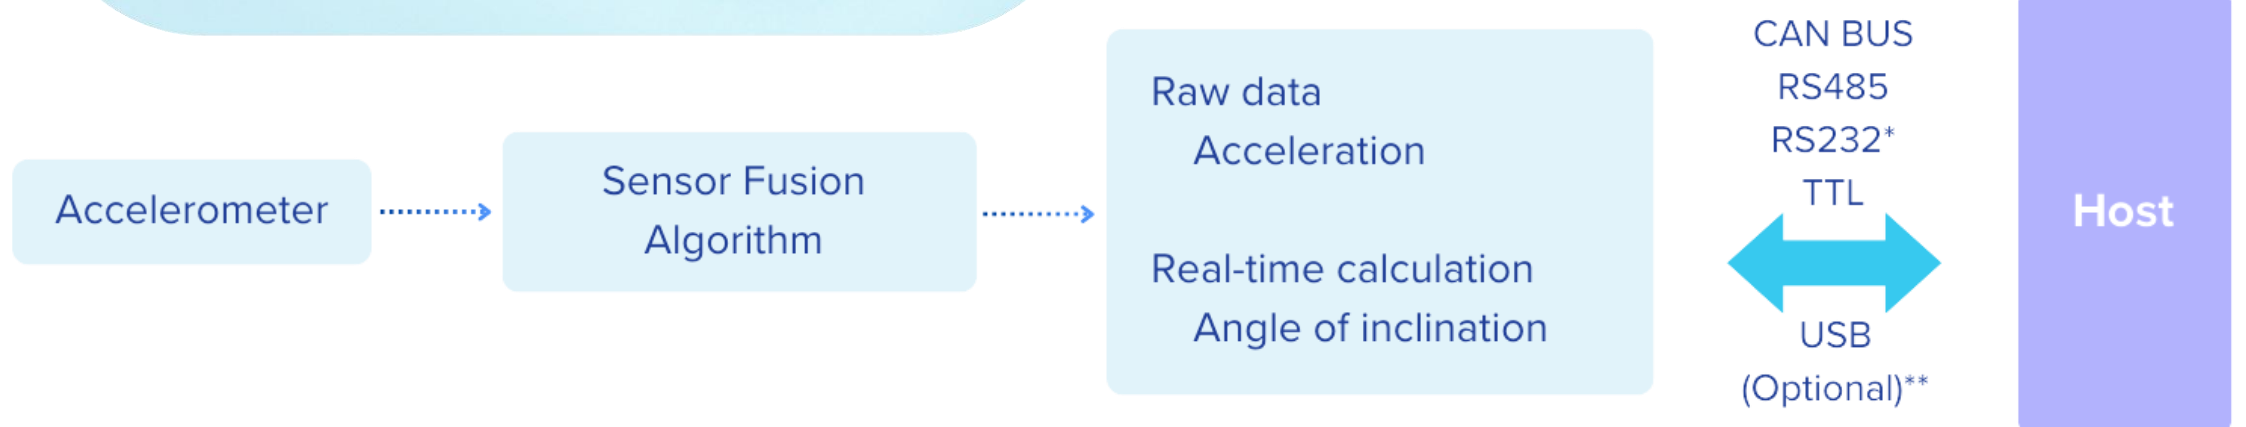



\*Currently, only RS232 and CAN communication methods are available for sale.  
\*\*For the latest USB communication options, please contact us.

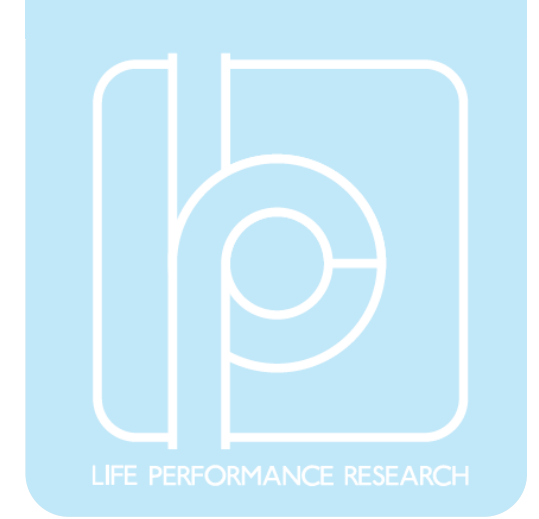

## Sensor specifications

Product name	LPMS-INC1 RS232	LPMS-INC1 CAN
Size	74 x 40 x 28.5 mm	
Weight	About 184 g	
Communication protocol	LPBUS	CANOpen
Interface*	Currently only RS232 is available	
Baudrate	921600 bps	1M bps
Dip measuring range	X: $\pm 90^\circ$ , Y: $\pm 90^\circ$	
Resolution	$< 0.001^\circ$ (Flot 32 output)	
Accuracy	0.011°(RMS)	
Zero bias error of accelerometer	X, Z: $\pm 20$ mg Y: $-20 \sim +20$ mg	
Zero bias temperature dependence of accelerometer**	X, Y : $\pm 10$ mg Z : $\pm 15$ mg	
Accelerometer noise density	X, Z : $\pm 20 \mu\text{g}/\sqrt{\text{Hz}}$ Y : $15 \mu\text{g}/\sqrt{\text{Hz}}$	
Data output format	Raw data / Dip angle / Temperature	
Data output rate	5 ~ 500 Hz	
Power consumption	240 mW (0.02A @12V)	300 mW (0.025A @12V)
Power supply (RS232)***	5-36 V DC	
Connector	M12	
Housing	Aluminum, IP67 rated	
Temperature range	$-20 \sim +80^\circ\text{C}$	

## External dimensions

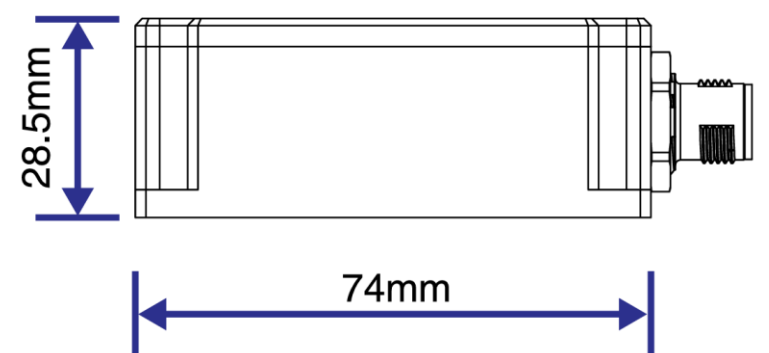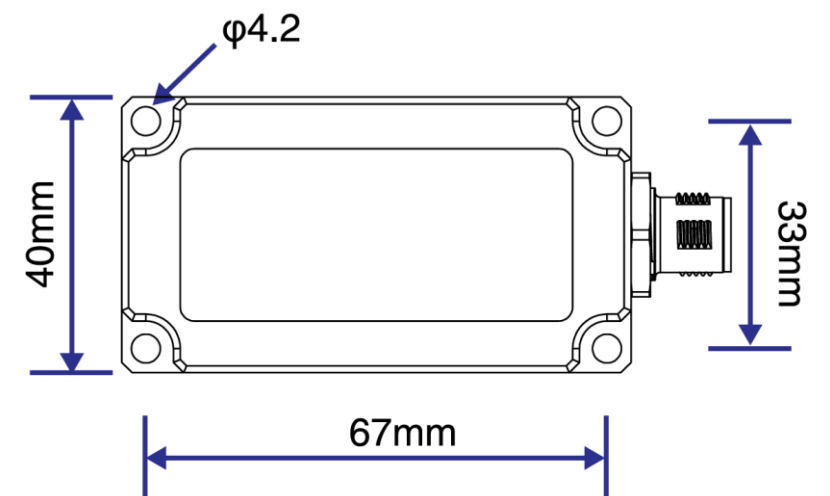

\*Please contact us if you need USB communication.

\*\* Difference from zero bias value at room temperature.

\*\*\* Performance parameters at room temperature+25 C, and reference values will change at other temperatures.

## Package

- LPMS-INC1 sensor × 1
- User guide card × 1
- Cable × 1
- Box × 1
- Warranty (1 Year)



## GUI of the software

